

Instructions for BEHRINGER BCR2000 & NATIVE INSTRUMENTS® Pro-53

BEHRINGER BCR2000 NI Pro53

This document will give you a quick overview about the BEHRINGER BCR2000 'NI PRO53' PRESET and how to install it.

Please consider this preset merely as a starting point and as inspiration for your own imagination.

Installation:

1. Open and extract the ZIP file.


The following files are included:

- This INSTRUCTION text document (.pdf)
- SINGLE PRESET file (.syx)
- 2. How to get the B-CONTROL PRESET from your computer into your hardware:
 - Connect the B-CONTROL to your computer via USB or MIDI port (Computer MIDI OUT to B-Control MIDI IN)
 - Select the correct USB or stand alone operating mode on the hardware (please refer to the manual for details)
 - Open the B-CONTROL preset file of your choice with a MIDI dump program like "MIDI-OX" or "Send-SX" on your computer or use the B-CONTROL EDIT software editor, which is available free of charge at our homepage www.behringer.com
 - Don't forget to **select the correct MIDI ports** in the dump software!

Dumping a single preset

- Select the desired preset ('bcr_NI_Pro53.syx') on your MIDI dump program
- 2. **Send the preset** to the B-CONTROL and wait until completion
- 3. **Push** the **STORE** button on the hardware
- 4. Select the desired destination preset number
- 5. **Push** the **STORE** button again
- 6. The preset is now saved on your hardware
- 7. Now you can dump the next preset (repeat the steps 1 thru 5 again)

Hint: If you do not want to overwrite one of your presets in the B-CONTROL hardware, select a free destination number at step 4 (e.g. preset 'P-32').

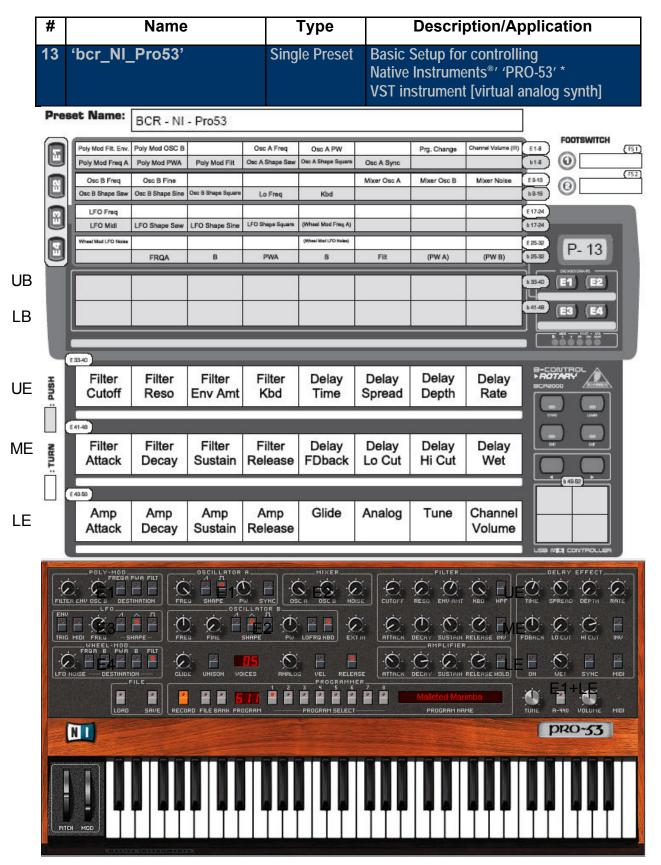

- E1 Encoder Group 1 (Poly-Mod., Osc. A, Main Param.)
- E2 Encoder Group 2 (Osc. B, Mixer)
- E3 Encoder Group 3 (LFO)
- E4 Encoder Group 4 (Wheel-Mod.)
- UB Upper Button Line (-)
- LB Lower Button Line (-)
- UE Upper Encoder Line (Filter, Delay)
- ME Middle Encoder Line (Filter Env., Delay)
- LE Lower Encoder Line (Amp Env., Main Param.)

